

**K1S**



## **Elevator Intercom**



**Elevator One  
Key Dialing  
Device**

**User manual  
V1.0**

## ▲ *Mainly Features*

- SOS one key emergency dialing
- High-fidelity two-way communication
- Can set 10 white list numbers
- Can be set to any number of incoming
- SOS can be set to send SMS to 3 user numbers
- Built in lithium battery, power-off SMS notification  
(Send SMS when power is off over 30 minutes)

## ▲ *Host View*



Microphone

Indicator Lamp (normally working)

Signal Lamp

GSM version: Flash means no signal, slow flash means normal signal.

3G version: When the signal is normal, the light goes out 1 time per second. When there is no signal, the light is on 1 time per second.

SOS dial key/Reset key

In standby mode, press to dial (3 times in turn to dial the first 3 white list numbers, anyone's answering means no next);

Calling state, press to hang up;

Reset: long press to boot, the indicator lamp flashes for 3 times to indicate the reset success.

Speaker

**▲ Settings** (all settings are set by SMS, the default password is 1234, and the instructions are uppercase letters, such as: 1234CN)

1) Select language:

**Chinese: Password + CN**

**English: Password + EN**

2) Modify password:

**Old password + P + new password**

3) Set up 10 white list numbers:

**Password + serial number + A + # + phone number + #** (No. 1-10)

(When these numbers in the white list call in, after 2 rings it goes into a two-way automatic answering. The first 3 white list numbers are for a key dialing number. Press the key, then dial the first number, no picking then dial the second number, by turns to dial for 3 times.)

4) Query white list numbers:

**Password + A + #**

5) Delete white list numbers:

**Password + serial number + A + #**

6) All numbers can be set to allow incoming (default):

**Password + CC** (all incoming numbers are automatically answered after 2 rings)

7) Set just to allow the white list numbers incoming:

**Password + DD** (Only the white list numbers can be automatically answered after 2 rings, the other incoming numbers are immediately hung up)

8) Set to press the SOS key to send SMS to the first 3 white list numbers:

**Password + B1 + # + the content of SMS + #**

9) Set to press the SOS key not to send SMS (default):

**Password + B2 + ##**

10) Query if send SMS after press the SOS key:

**Password + B + #**

## ▲*Product specification*

Item name: Elevator Intercom

Supply voltage: 9-24VDC


Built in backup battery: 3.7V/680mAh lithium battery

GSM frequency: 850/900/1800/1900 MHz, optional 3G

Note: the jumper cap of J4 is built-in battery switch.



**Figure 1 (closed state)**

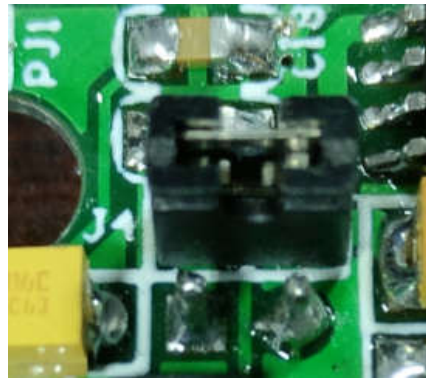

**Figure 2 (connecting state)**